



HDFFA75BA80/160 Three Phase Diode & Thyristor

Feature



Typical application



! "



\$

% & ' () °C*



				+
		, - .) /0	, - .) 120	
3\$\$	\$ 4 5 \$ 3	/00	1200	3
3\$	6 7\$ 4 5 \$ 3	820	1.00	3

				+
	! % *	' 11. °C	.)	
-)0920, 5 7	81091000	
&	! &		7: 0 ; 1)0	°C
<			7: 0 ; 1()	°C
3	5 3 %\$ *	\$ ' 1 _1 % #*	()00	3
-	()*		(.	67
>			1)0	



"

				+
\$\$	\$ 4 5 \$ #	& ' 1)0°C 3\$ · 3\$\$	/	
3_	- 3 #	& ' ()°C, - ')0	1 ?0	3
\$ %7 *	#	& % ! A*	0 ()	°C9>
\$ % 7*	#	-	0 10	°C9>



HDFA75BA80/160 Three Phase Diode & Thyristor

● , B\$! \$

■ # \$

% & ' () °C*

				Unit
		, - .) /0	, - .) 120	
3\$\$	\$ 4 5\$ 3	/00	1200	3
3\$	6 7\$ 4 5\$ 3	820	1.00	3
3 \$	\$ 4 5 7 3	/00	1200	3





				+
# \$ %	! 7	# & °C	.)	
#	! 7	5 7 ,)0920,	81091000	
!	!		:1)0	!
	\$ \$! 7	· & (& ! \$	1)0)
3	5 3 %\$ *	\$ '1 =1 % #*	()00	3
&	! &		7:0 ;1?)	°C
<			7:0 ;1()	°C
-	()*		(.	67
>			1)0	

■ Electrical Characteristics

\$	\$ 4 5! 7 #	& '1?)°C 3 ·3 \$	20	
\$\$	\$ 4 5\$ #	& '1?)°C 3 ·3\$\$	20	
3	4 5! 7 3 #	& '1()°C ·)0	1 (0	3
' #	C #	& (&	.0	
' #	C 3 #		? 3	
*	\$ \$! 7 3	& '1()°C &)00	
\$ % *	#	&	0 : 0	°C9>
\$ % 7 *	#	-	0 10	°C9>



HDFA75BA80/160 Three Phase Diode & Thyristor

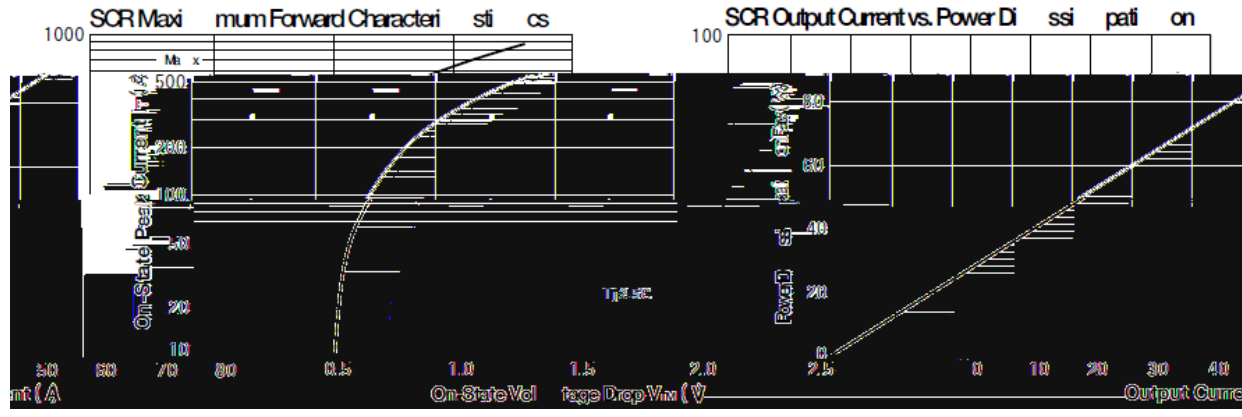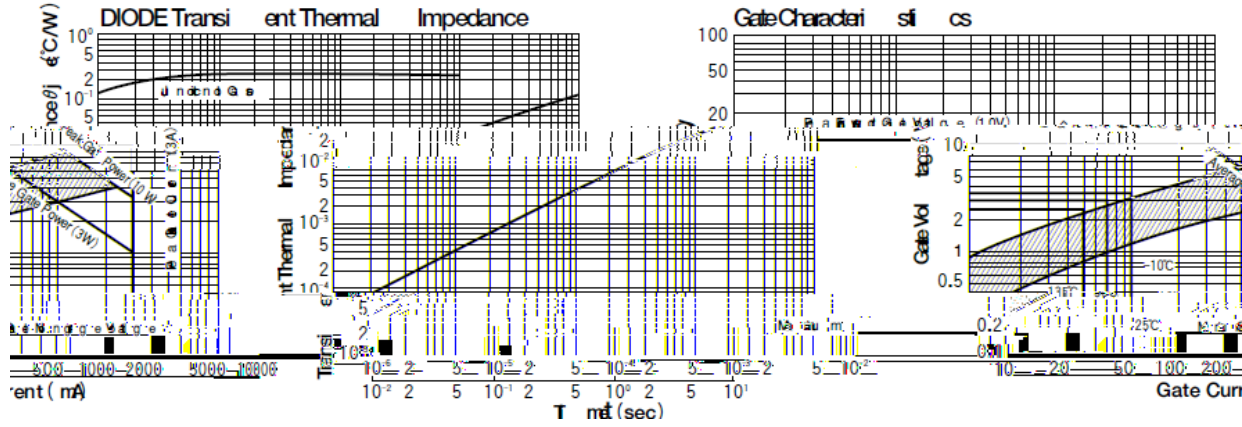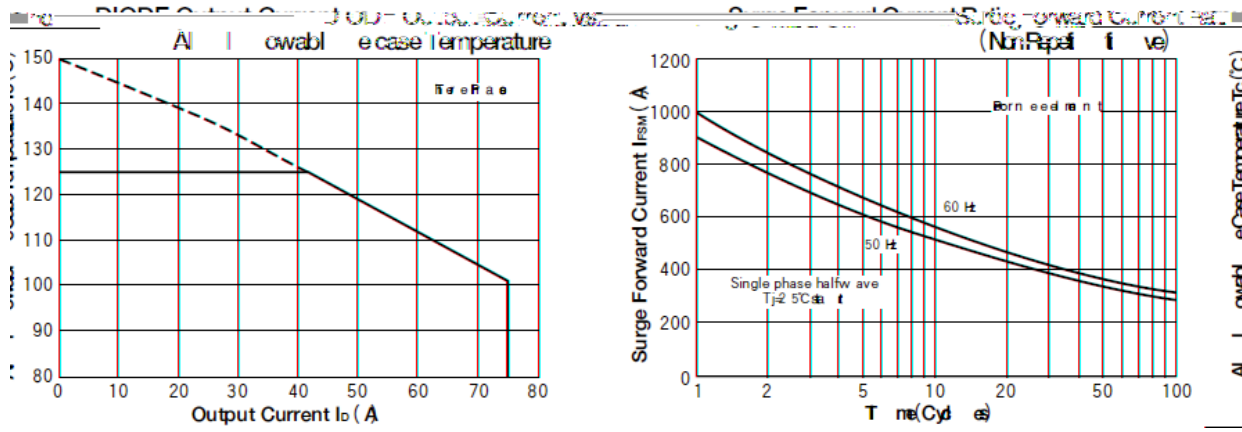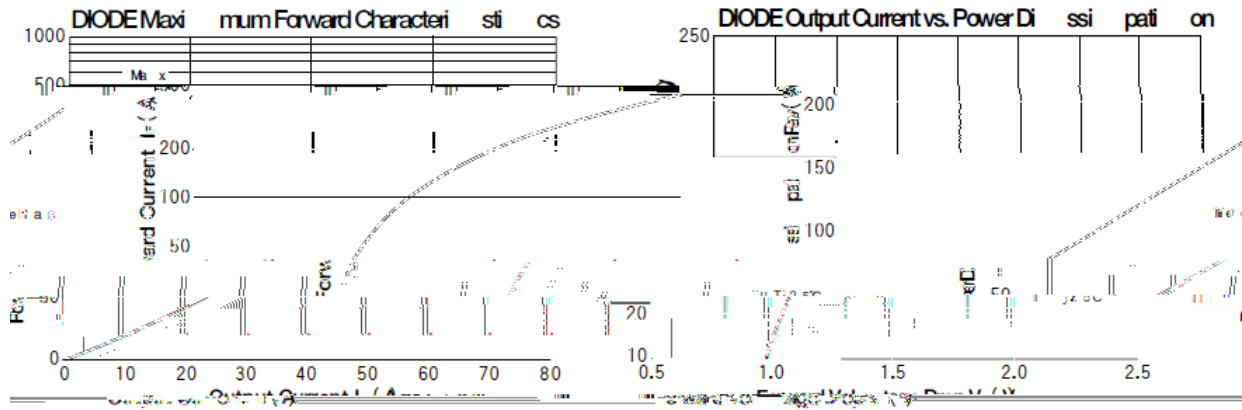



HDFA75BA80/160 Three Phase Diode & Thyristor

SCR Output Current vs.

