


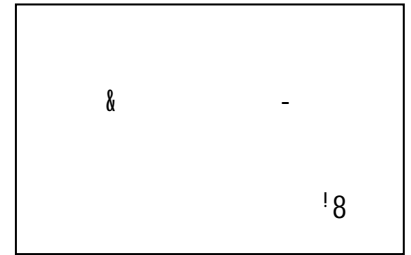
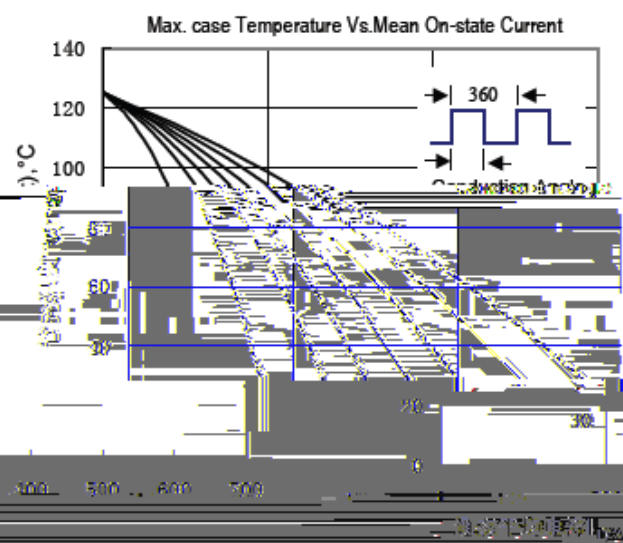
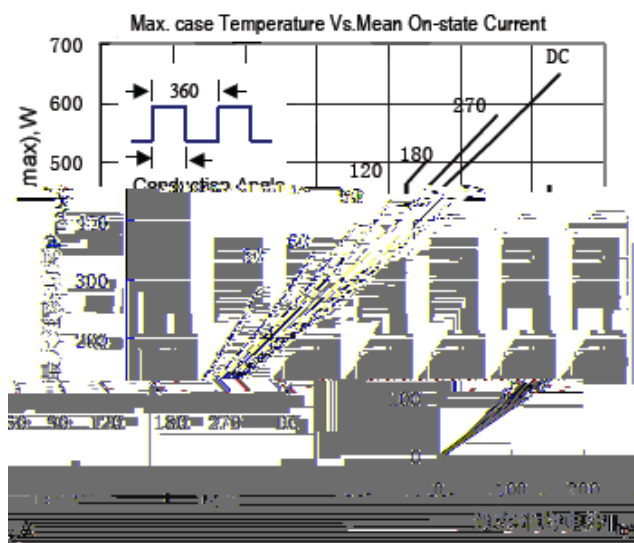
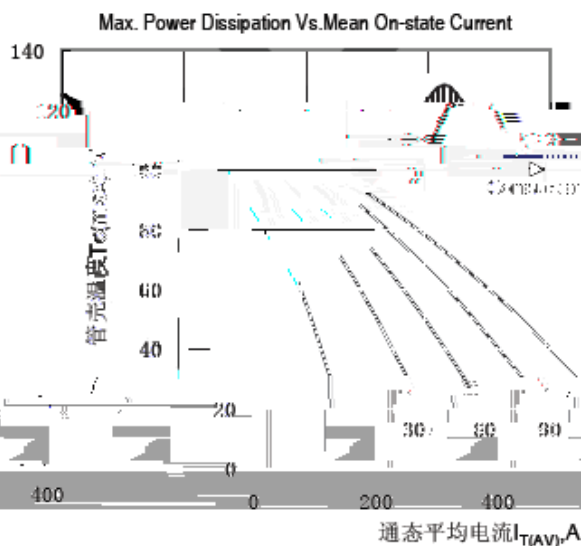
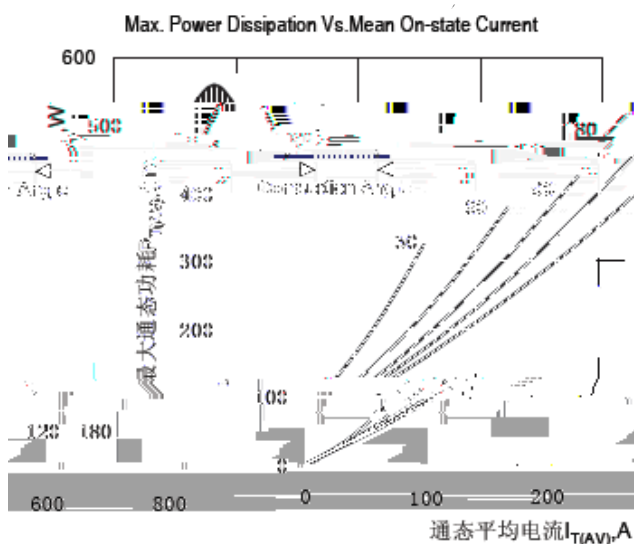
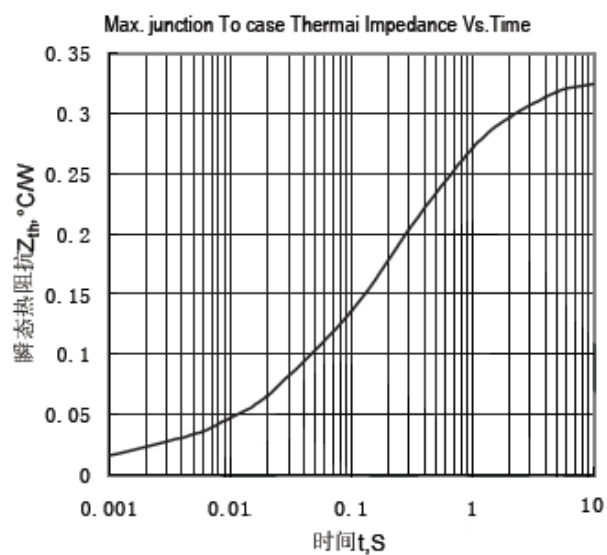
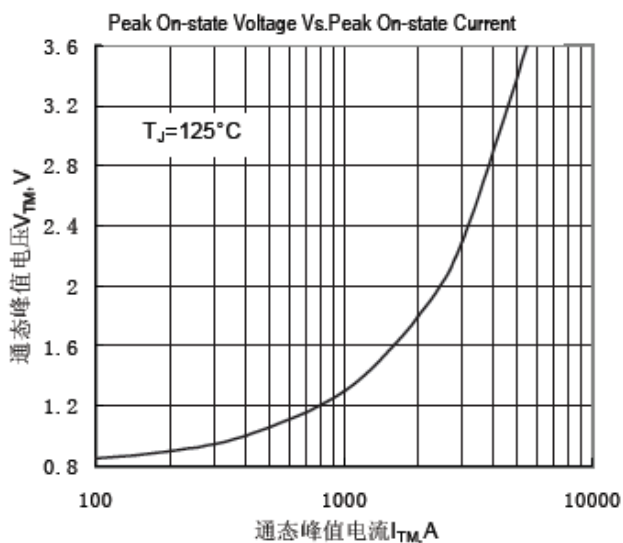
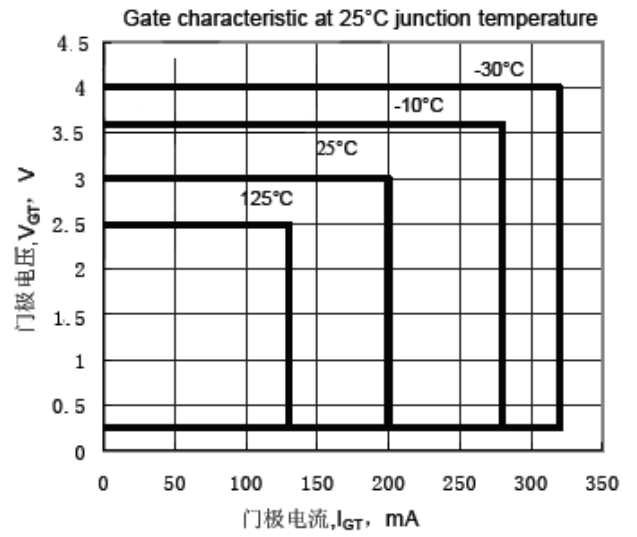


- 芯片与底板电气绝缘，交流电压
- 国际标准封装：全压接结构，优良的温度特性和功率循环能力  
型应用
- 交直流电机控制，各种整流电源
- 工业加热控制，调光，无触发点开关
- 电机软起动，静止无功补偿
- 电焊机，变频器，电源，电池充放电

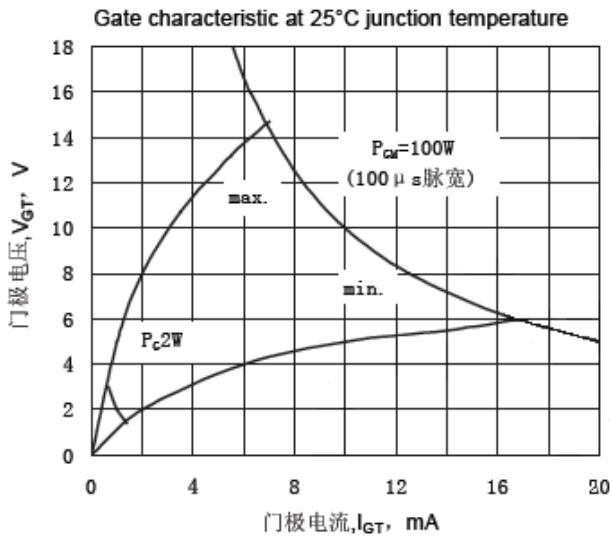

				最小	典型	最大	
							!
"							
#						!	
\$%&\$							&'
\$(&\$			) #				&'
)				!			
)			*				
)							
+,-.							&/
+.-+							&/
(0							
1							2-
							2-
3	储			-			
/					!		4
" ' 5(67							

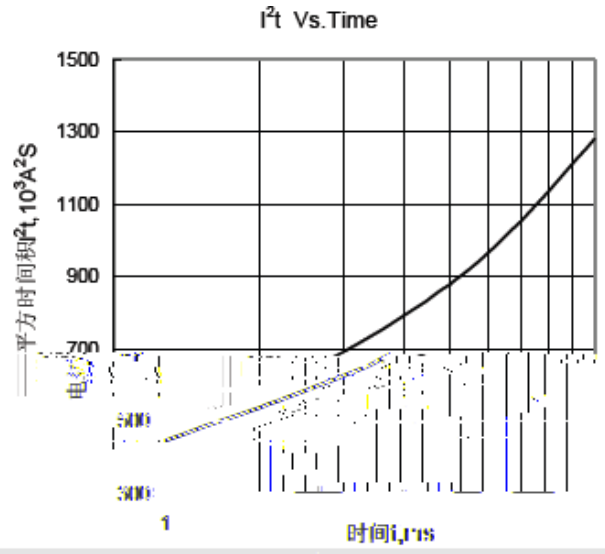

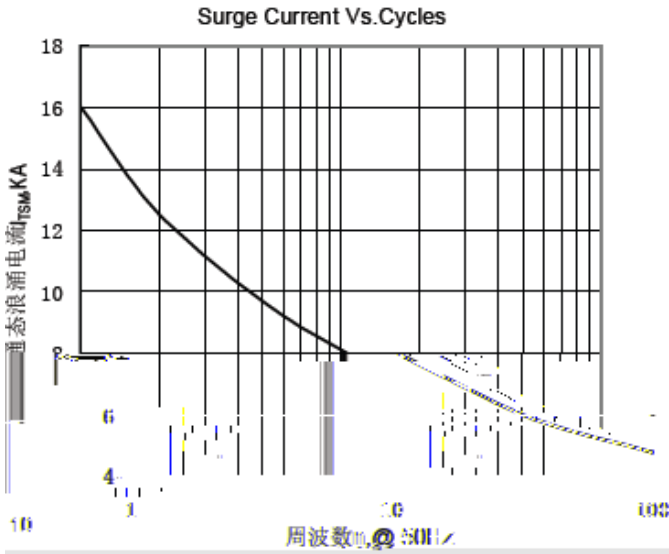


门极率

门极触发

外形图:

线路图:

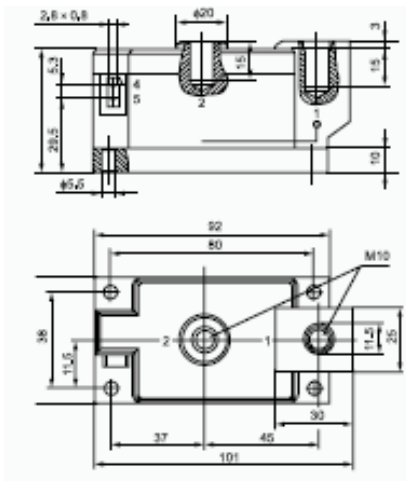

图

