


特点

2500V

150

PWM

典型应用

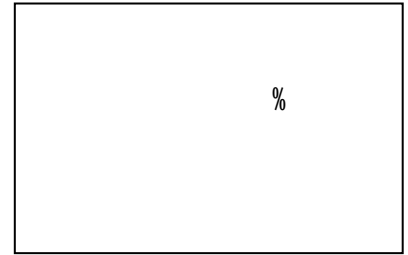

焊

				典型	大	
	输出电	相全波整 电路,				
	反向重复峰 电压					
	反向重复峰 电					
	正向不重复浪涌电	底宽, 正弦半波				
	浪涌电 平方时间积					
	门槛电压					
	斜率电阻					Ω
	正向峰 电压				!"	
# %&	热阻抗 ( 至壳)	面散热				'(
# &##	热阻抗 (壳至散热器	面散热				'(
) *	绝缘电压	+,- - )..- )*/ 0				
	安装扭矩 (					1%
	安装扭矩 (			!		1%
2	存 度			%!		
(	质量					3
4 5). 6	外形					

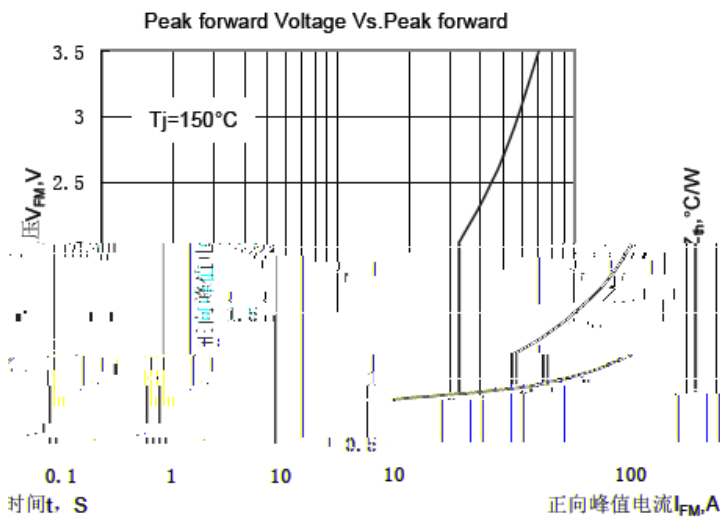


Fig.1

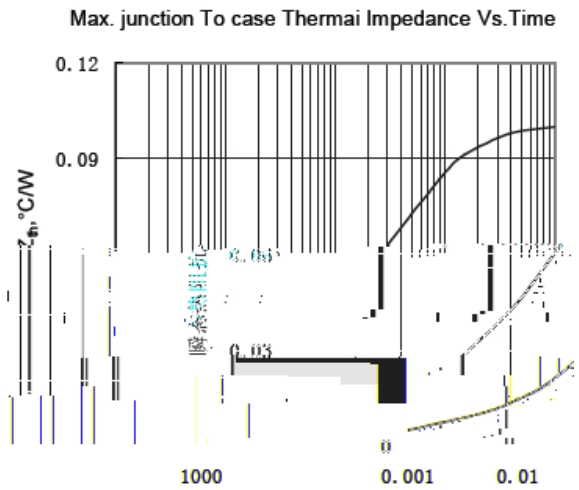


Fig.2

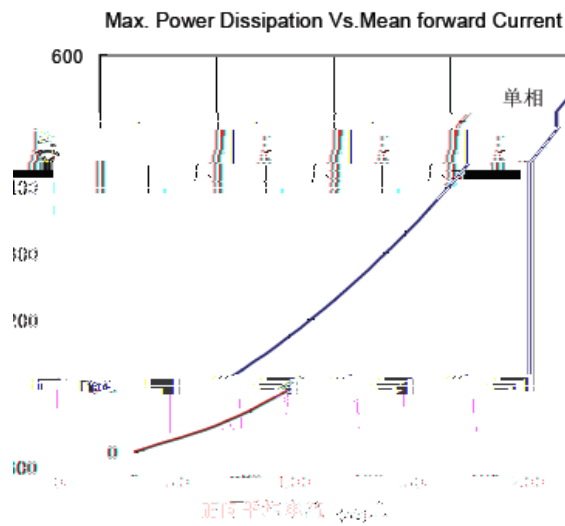


Fig.3

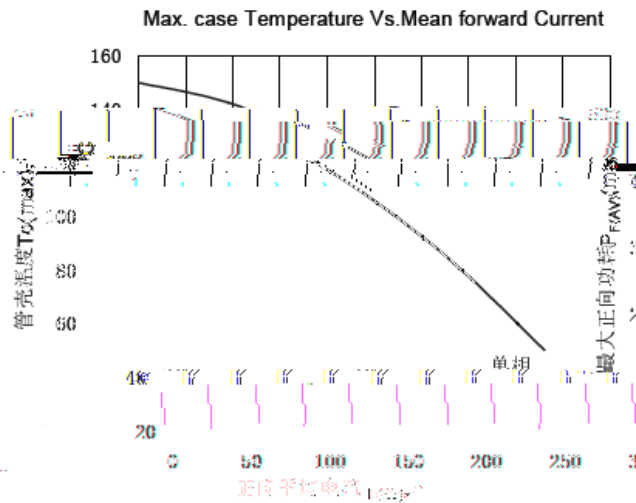


Fig.4

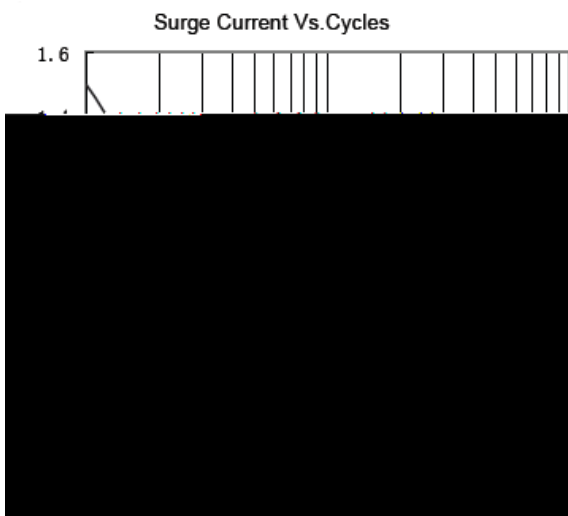


Fig.5

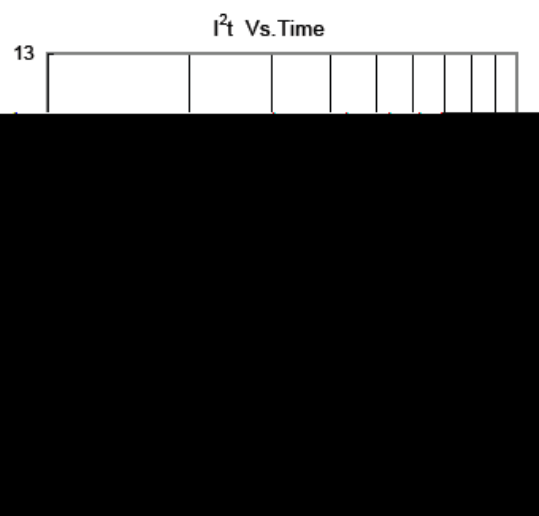


Fig.6

外形图:

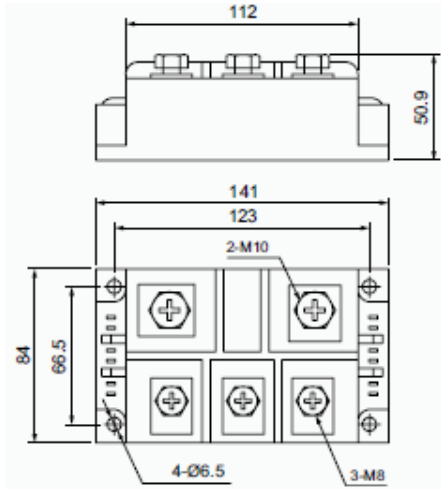


图 1

路图:

